


Как задать код
верификации для устройств
Hiwatch, Hikvision ?



Первый способ.

При активации устройства через программу SADP

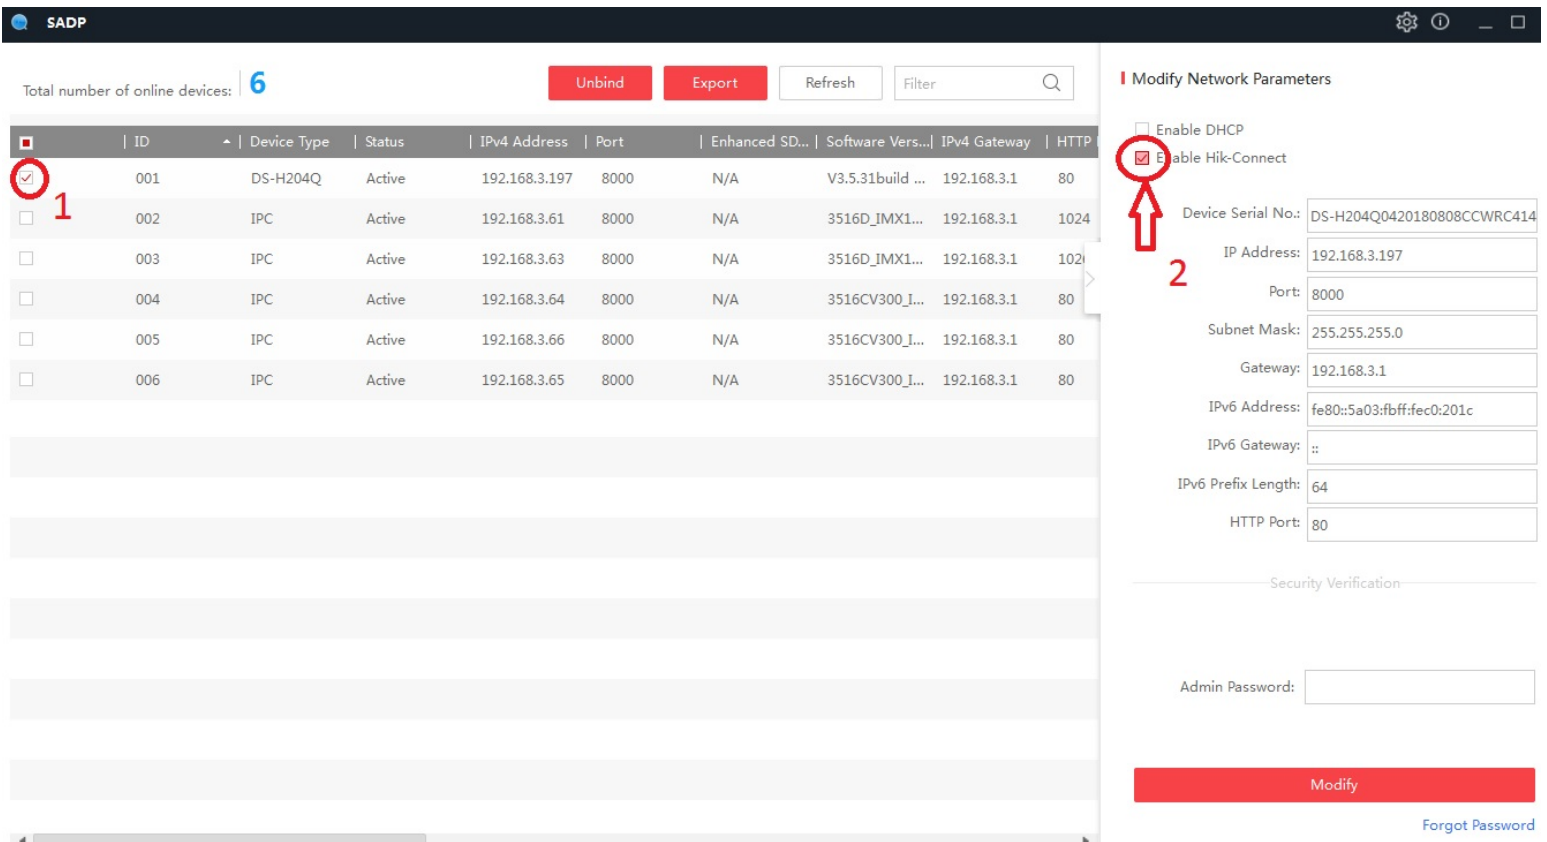

Total number of online devices: 6

ID	Device Type	Status	IPv4 Address	Port	Enhanced SD...	Software Vers...	IPv4 Gateway	HTTP
001	DS-H204Q	Active	192.168.3.197	8000	N/A	V3.5.31build ...	192.168.3.1	80
002	IPC	Active	192.168.3.61	8000	N/A	3516D_IMX1...	192.168.3.1	1024
003	IPC	Active	192.168.3.63	8000	N/A	3516D_IMX1...	192.168.3.1	1024
004	IPC	Active	192.168.3.64	8000	N/A	3516CV300_I...	192.168.3.1	80
005	IPC	Active	192.168.3.66	8000	N/A	3516CV300_I...	192.168.3.1	80
006	IPC	Active	192.168.3.65	8000	N/A	3516CV300_I...	192.168.3.1	80

Modify Network Parameters

Enable DHCP

Enable Hik-Connect

Device Serial No.: DS-H204Q0420180808CCWRC414

IP Address: 192.168.3.197

Port: 8000

Subnet Mask: 255.255.255.0

Gateway: 192.168.3.1

IPv6 Address: fe80::5a03:fbff:fec0:201c

IPv6 Gateway: ::

IPv6 Prefix Length: 64

HTTP Port: 80

Security Verification: _____

Admin Password: _____

Modify

[Forgot Password](#)

В новых версиях программы начать работу с облаком можно уже при активации устройства. Поставив галочку напротив “Enable Hik-Connect”, вы увидите следующее окно:

Tips



To enable Hik-Connect service, you need to create a verification code or change the verification code.

Verification Code

6 to 12 letters (a to z, A to Z) or numbers (0 to 9), case sensitive. You are recommended to use a combination of no less than 8 letters or numbers.

Confirm Verification Code

The Hik-Connect service will require internet access. Please read the ["Terms of Service"](#) and ["Privacy Policy"](#) before enabling the service.


Confirm

Cancel

Примерный перевод: “От 6 до 12 букв, латинский алфавит и цифры от 0 до 9, код чувствителен к регистру. Рекомендуется использовать комбинацию не менее чем из 8 букв и цифр”.

Второй способ.

Используя веб-интерфейс.

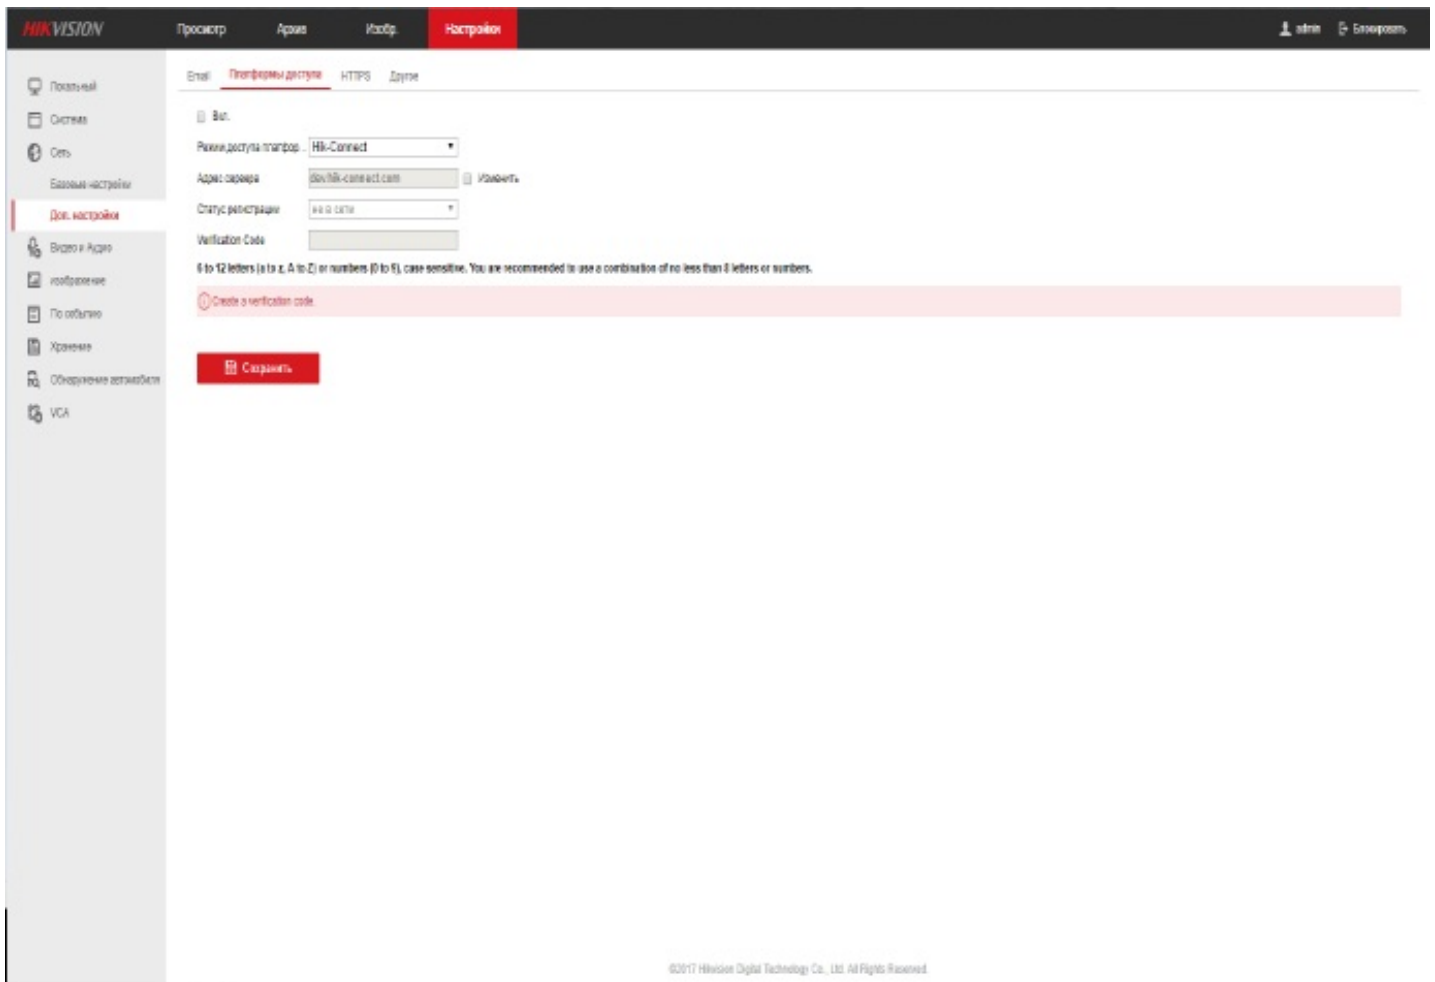

Зайдите в “Настройки” - “Сеть” - “Доп. настройки” - “Платформы доступа”.

При попытке поставить галочку “Вкл.” увидите такое окно. В котором задается код верификации.

Примечание

To enable Hik-Connect service, you need to create a verification code or change the verification code.

Verification Code


6 to 12 letters (a to z, A to Z) or numbers (0 to 9), case sensitive. You are recommended to use a combination of no less than 8 letters or numbers.

Confirm Verification Code

The Hik-Connect service will require internet access. Please read the "[Terms of Service](#)" and "[Privacy Policy](#)" before enabling the service.

Третий способ.

Работая напрямую с регистратором.

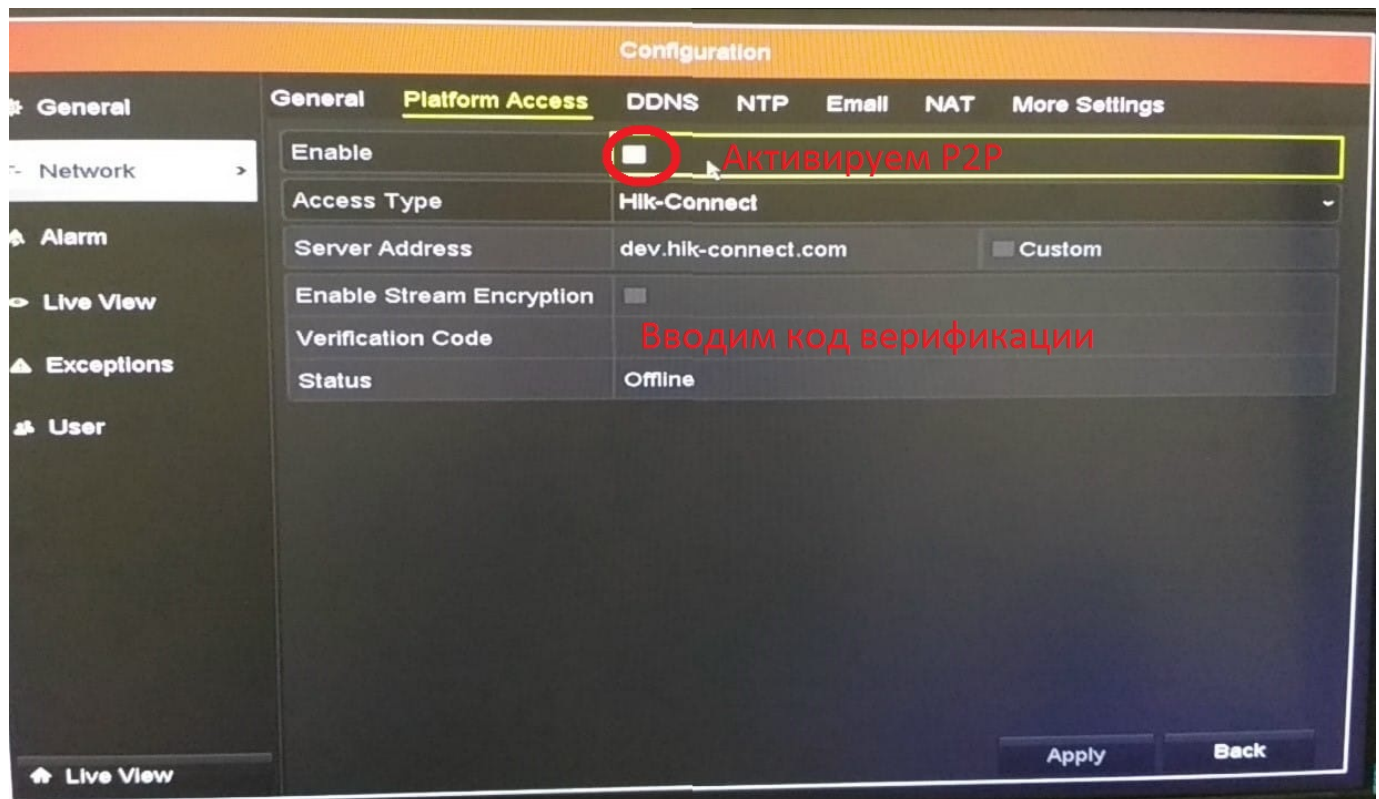

The screenshot shows the 'Configuration' page for Hik-Connect. The 'Platform Access' tab is selected. The 'Enable' checkbox is checked and highlighted with a red circle and the text 'Активируем P2P'. The 'Access Type' is set to 'Hik-Connect'. The 'Server Address' is 'dev.hik-connect.com' with a 'Custom' checkbox. The 'Verification Code' field is empty, with the text 'Вводим код верификации' below it. The 'Status' is 'Offline'. The 'Apply' and 'Back' buttons are at the bottom right.

General	Platform Access	DDNS	NTP	Email	NAT	More Settings
Enable	<input checked="" type="checkbox"/>					
Access Type	Hik-Connect					
Server Address	dev.hik-connect.com				<input type="checkbox"/> Custom	
Enable Stream Encryption	<input type="checkbox"/>					
Verification Code						
Status	Offline					